

COMPACTION CONTAINERS



Octagon and OC Ultra

Roll-Off Octagon 30 and 40 Cubic-Yard Compaction Containers


Innovative. Reliable. Efficient.

Marathon® Octagon Compaction Containers are designed with a contoured end, which creates a rolling effect as solid waste is compressed into the container. This unique design fills voids and results in a highly dense compaction.



OC Series Features & Benefits

- ▼ The design and construction of the floor, front, and door were specifically designed to withstand abuse and ensure strength and longevity
- ▼ Floor and container sides are constructed out of 7 ga. steel plate “backed” with 3" structural steel channel
- ▼ 8 5/8" diameter ground rollers
- ▼ Longitudinal rails made of 2" x 6" structural steel tubing
- ▼ The door is reinforced with 3" structural steel channels, deep box sections of 7 ga. steel plate, and 3/4" x 4" bar stock hinges
- ▼ Hinges, guide rollers, and ground rollers are equipped with grease fittings
- ▼ Understructures available to fit most roll-off hoists
- ▼ 46 3/8" (h) x 64" (w) standard door opening (other sizes optional)

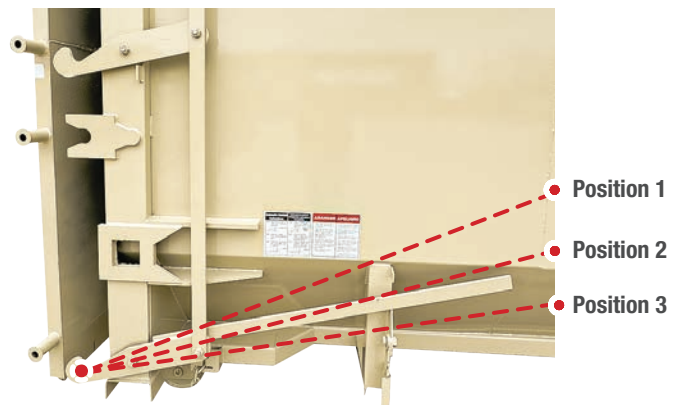

Automatic Three-Position Door Latch

Position 1: Unlock position

Position 2: Automatic latching position: When the door is closed, the latch automatically engages the door.

Position 3: Locked position: The latch is secured for travel with the “latch lock” feature.





- Self-Contained Compactors
- TC Tanks
- Stationary Compactors
- Auger Compactors
- Containers & Carts
- VIP
- MPT
- Mini-Mac
- VB
- Cart Dumpers

MARATHON WARRANTY

The best coverage in the business

Marathon® Equipment is pleased to announce the release of our updated Warranty Coverage program. This warranty will take effect and be applicable on all products sold on or after June 1st, 2021. Note that this warranty plan is not retroactive to products sold prior to June 1st, 2021.

3 Yr. Structural, 2 Yr. Parts, 1 Yr. Labor Marathon Compaction Solutions Warranty

Our existing Signature Series Warranty, Compactor Warranty, and Auger Warranties have been combined into a new Compaction Solutions Warranty. The Compaction Solutions Warranty includes **3-years structural warranty, 2-years part warranty, and 1-year labor warranty.**

To learn more, visit: www.marathonequipment.com/warranty

Octagon and Ultra® Containers are compatible with the following Marathon products:



RJ-325 Stationary Compactor

The RJ-325 features a user-friendly 48" deck height while maintaining the same clear-top opening as a 4 yd. compactor, and ensures top performance in heavy commercial and industrial applications.



Shown with optional equipment

RJ-450 Stationary Compactor

The RJ-450 features even greater compaction force and faster cycle time, making it ideal for higher volume, heavy-duty industrial applications.



RJ-500 Stationary Compactor

The RJ-500 features a large clear-top opening and a deep charge box, which is reinforced to allow for greater compaction and durability.



RJ-550 Stationary Compactor

The RJ-550 is a high-capacity, heavy-duty compactor, ideal for industrial and commercial applications where large volumes of solid waste are generated.



RJ-575HD Stationary Compactor


The RJ-575HD is a high-capacity, heavy-duty compactor, ideal for heavy-industrial applications. Its large hydraulic power unit, rugged construction, and oversized clear-top opening allow for reliable feeding and maximum compaction performance.

COMPACTION CONTAINERS



Octagon and Ultra Compaction Containers

Dimensions and Specifications

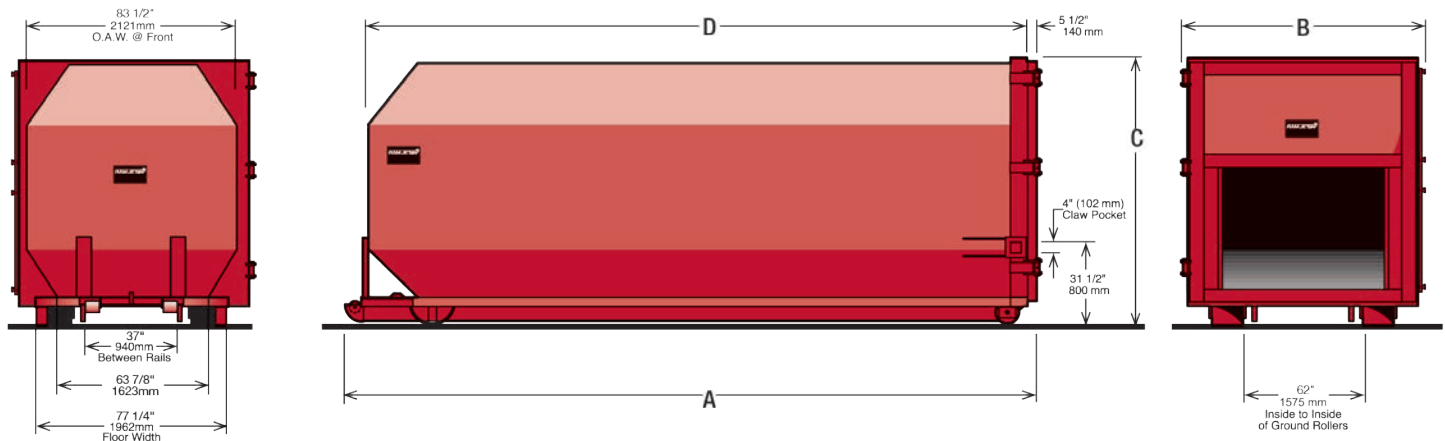

Dimensions	A		B		C		D		Capacity		Maximum Force Rate		Weight	
RJ-30 OC	203 1/2"	5169mm	97 7/8"	2486mm	104 1/2"	2654mm	185 1/2"	4712mm	30 yd ³	23 m ³	80,000 lbf	355.8 kN	5,400 lbs.	2450 kg
RJ-40 OC	266"	6756mm	97 7/8"	2486mm	104 1/2"	2654mm	251"	6375mm	40 yd ³	31 m ³	80,000 lbf	355.8 kN	6,550 lbs.	2971 kg
RJ-40 OC ULTRA®	266"	6756mm	97 7/8"	2486mm	104 1/2"	2654mm	251"	6375mm	40 yd ³	31 m ³	70,000 lbf	311.3 kN	5,500 lbs.	2495 kg
RJ-40 OC/XHD	266"	6756mm	97 7/8"	2486mm	104 1/2"	2654mm	251"	6375mm	40 yd ³	31 m ³	120,000 lbf	533.73 kN	8,150 lbs.	3697 kg

Pictures and mechanical diagrams in this literature are illustrative only and may not be to scale. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI standard Z245.2, all applicable OSHA Regulations. Products must be used only by trained operators in accordance with the Operator Manual, as well as applicable regulations, laws, and ANSI standards.

We're Here To Help!

For detailed specifications, recommendations, or to request a site survey comparing various systems, contact the Marathon Customer Care team at: **800.633.8974**

Authorized Dealer:



Marathon Equipment Company | P.O. Box 1798 | Vernon, AL 35592-1798

Learn more about Marathon Equipment: **800.633.8974** | www.marathonequipment.com

© 2025 Marathon Equipment Company. All rights reserved.



www.marathonequipment.com

Contact your Marathon® authorized dealer: